

ATLAS KOMPAKT

AC 20B

AC 20B MINI-SIZED EXCAVATOR



ATLAS KOMPAKT

ATLAS KOMPACT GmbH

Stedinger Strasse 324, 27751 Delmenhorst, Germany

Tel.: +49 (0) 4221 491330; Fax: +49 (0) 4221 491331

E-mail: info@atlas-kompakt.com

www.atlas-kompakt.com

Please read the manual book and maintenance book before operation, changes are periodically added to the information, and ATLAS KOMPACT may change the products or services described in this book at any time without announcement. All rights of this manual book reserve to ATLAS KOMPACT. ATLAS KOMPACT Internal Use Only.
AC EN 2017-08

Engine netpower: 13.3kW

Machine weight: 1940/1840kg



Outstanding performance

Yanmar engine

With low noise and vibration, it is popular among compact equipment and it is easy to maintain the main components.



Pilot traveling control

Pilot traveling control for precise and correct operation

Auto gear shifting during traveling

Auto high-speed and low-speed gear shifting; in case of obstacles during high speed traveling, it shifts to low speed gear of high torque;



Easy to transport



Telescopic chassis

Simple single lever controls the width of chassis to as narrow as 990mm and to as wide as 1360mm to enhance operation stability.



Comfort cab



Comfort operation environment

Wider space and wide view enabled by enlarged front windscreen and sunroof; in addition, the high-quality floating shock absorber seat, radio, cup holder and reading light ensure a comfortable driving experience;



Safe driving space

Frame supported cab with Fops/Tops safety certificate, regular protection mechanism of front windscreen, hidden seat belt and safety hammer for safety of driver;



Clear monitoring instrument that is easy to operate

- List of display items
- | | | |
|-----------------------|------------------------------------|----------------------------|
| • Coolant temperature | • Traveling mode | • Oil pressure warning |
| • Fuel level | • Operation light | • Charging indication |
| • Working hours | • Various warning lights of engine | • Working light indication |
| • Time | • Overheat warning | |




Easy service

The tail hood can be open to a large degree, which makes easier daily inspection and change of filters. The left lower service hole makes easier maintenance of multi-way valve without removing the cab; exterior fuel filler makes refueling easier.



- | | | |
|-------------------------|---|---------------------------|
| A Air filter | D Interface for pressure measurement | G Fine fuel filter |
| B Pilot filter | E Primary fuel filter | H Oil filter |
| C Expansion tank | F Electric oil suction pump | I Oil filler |

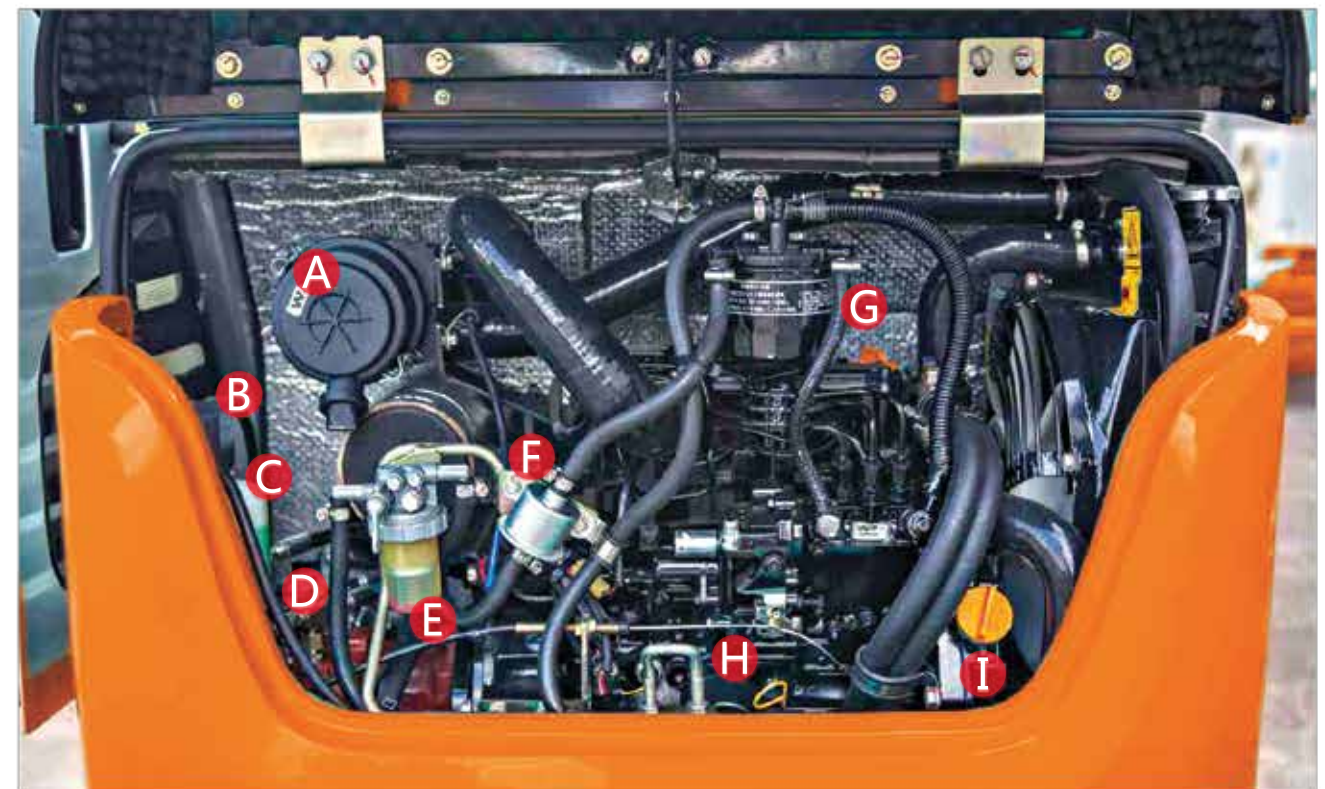



LED working light

Sleeve of pipe wire

LED warning light

Tools placement location

**Auxiliary pipes(Standard)
Hydraulic quick
hitch pipes(optional)**

**Collected
grease filling**

Cast slew joint

Foldable dozer blade


Equipment

The regular and optional equipment varies from country to country.
For more information, please contact with us.

Engine		Cab	
Oil filter	●	AM/FM radio	●
Fuel filter	●	Cup holder	●
Oil-water separator	●	Suspension seat	●
Air filter	●	Heating system	●
Radiator	●	Engine neutral start system	●
Alternator	●	Retractable safety belt	●
Expansion tank	●	FOPS/TOPS cab	●
Electronic fuel pump	●	FOPS/TOPS Canopy	○
Muffler	●	Windscreen washer and wiper	●
Hydraulic system		Left/right rearview mirror	●
Hydraulic pilot control rod	●	Cigar lighter	●
Slewing parking brake system	●	Safety device of front windscreen	○
Traveling parking brake system	●	Front working devices	
Dual-speed traveling system	●	260 mm bucket	○
Auto traveling gear shifting system	●	380mm bucket	●
Light		600 mm bucket	○
Boom light	●	1000 mm bucket	○
Superstructure light	●	Breaker pipeling	●
Front cab light	●	Auxiliary pipeling	○
Warning light	●	Hydraulic quick hitch pipeline	○
Components of understructure			
230mm rubber track	●		
230mm steel track	○		


● Regular equipment ○ Optional equipment

AC 20B Technical Parameters			
Type of cab		cabin/canopy	
Bucket capacity,std.		m³	0.04
Bucket width		mm	380
Machine weight		kg	1940/1840
Dimensions	Overall length	mm	3820
	Overall height	mm	2370
	Overall width	mm	990
	Ground clearance	mm	482
Engine	Brand	Yanmar	
	Model	3TNV76-SSU	
	Displacement	L	1.116
	Output	kW/rpm	13.3/2200
Working ranges	Max cutting height	mm	3770
	Max loading height	mm	2720
	Max digging depth	mm	2380
	Max digging reach	mm	4040
	Boom swing angle (left/right)	°	75/50
	Front swing radius	mm	1565
	Tail swing radius	mm	1120
	Max digging force (Arm)	kN	9.83
	Max digging force (Bucket)	kN	22.7
Track	Type	Rubber crawler	
	Rubber shoe Width	mm	230
Undercarriage	Track Length	mm	1555
	Length to center of Rollers	mm	1210
	Lenhth to center of track	mm	760/1130
	Travelling spaeed(High/Low)	km/h	3.5/2
	Gradeability	deg	30
Swing speed		rpm	10
Ground pressure		kpa	30
Dozer size	Width	mm	990/1360
	Height	mm	267
	Lifting capacity (Height/Depth)	mm	295/360
Hydraulic pumps	Type	2 variable plunger pump,1Gear pump	
	Flow rate	L/min	2*21+15
	Hydraulic pressure	Mpa	2*22.5+18
Swing motor		Plunger motor	
Travel motor		2-speed plunger motor	
Fuel tank capacity		L	23
Hydraulic oil tank capacity		L	35

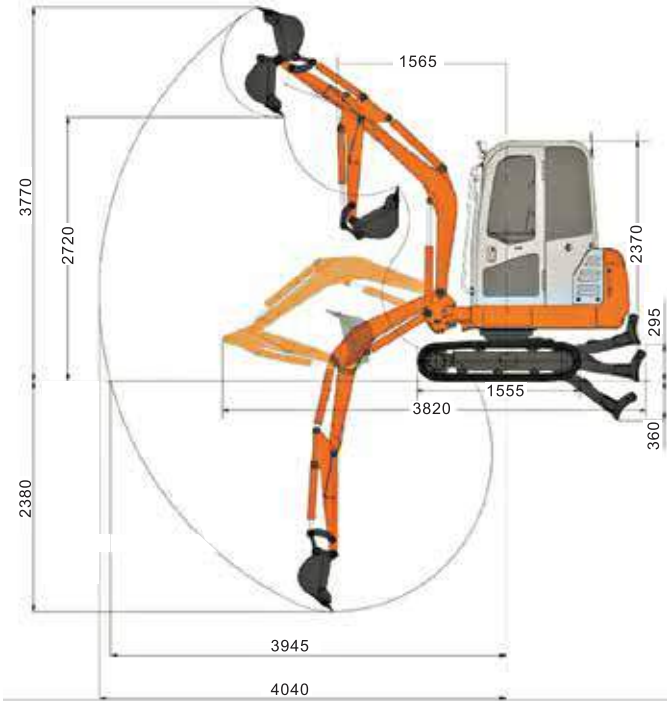

Load Capacity:

Lift Point Height	Lift Point Radius(MAX)		Lift Point Radius(3.0m)		Lift Point Radius(2.0m)	
	Over-front(kg)	Over-side(kg)	Over-front(kg)	Over-side(kg)	Over-front(kg)	Over-side(kg)
2.0m	260.0*	180.0	250.0*	210.0	-	-
1.50m	280.0*	150.0	310.0*	200.0	470.0*	380.0
0m	300.0*	160.0	360.0*	190.0	670.0*	350.0
—1.0m	330.0*	200.0	-	-	620.0*	340.0

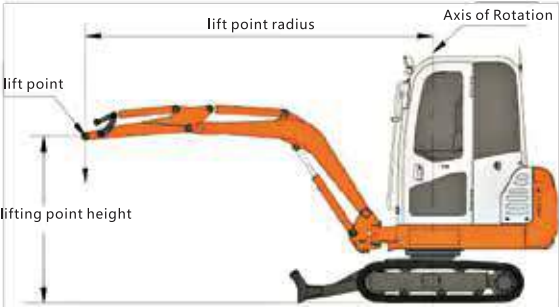

- Notes :
1. Load with * is limited by hydraulic capacity and based on ISO 10567.Rated loads do not exceed 87% of hydraulic capacity.
 2. Load without * is limited by tipping load and based on ISO 10567.Rated loads do not exceed 75% of tipping capacity.
 3. The excavator bucket,hook,sling and other lifting accessories are not included in this table.